

| | | | |
|----------|--|-------|--|
| Customer | | Date | |
| Contact | | Phone | |
| | | Fax | |


| | | | |
|--------|--|--------------|--|
| Part # | | Euclid Part# | |
|--------|--|--------------|--|

| | | | |
|------------------|--|------------------|--|
| Outside Diameter | | Type of Material | |
| Load 1 (lbs.) | | @ Length 1 | |
| Load 2 (lbs.) | | @ Length 2 | |
| Type of Ends | | Maximum Solid | |

| | | | |
|-------------|--|-----------------------------|--|
| Free Length | | Spring Rate (Pounds / Inch) | |
|-------------|--|-----------------------------|--|

| | | | |
|------------------------|--|------------------------------|--|
| Wire Diameter | | Modulus of Rigidity | |
| Mean Coil Diameter | | Estimated Load @ Solid | |
| Active Coils | | Tensile Strength of Material | |
| Total Coils | | Tensile Strength % allowable | |
| Pitch | | Maximum Allowable Stress | |
| Actual Solid Height | | Wahl Corrective Factor | |
| Load @ Solid Height | | Feet / Pound Material | |
| Calculated Free Length | | Calculated Weight / Piece | |
| Inside Diameter | | Spring Index | |

| | | | |
|----------------------------------|--|-----------------------------------|--|
| Uncorrected Stress @ Load1 | | Corrected Stress @ Load 1 | |
| Uncorrected Stress @ Load2 | | Corrected Stress @ Load 2 | |
| Uncorrected Stress @ Solid | | Corrected Stress @ Solid | |
| Calculated Set Point Load (Lbs.) | | Calculated Set Point Length (In.) | |

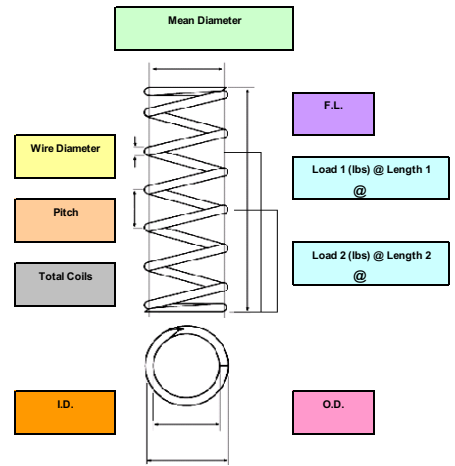

Note: All dimensions are in inches

Green - Acceptable Stress Level
 Red - Over maximum allowable design stress, setting likely

SPRING@EUCLIDSPRING.COM
WWW.EUCLIDSPRING.COM

EUCLID SPRING COMPANY, INC.
 30006 LAKELAND BOULEVARD
 WICKLIFFE, OH 44092
 440-943-3213(P) 440-943-4668(F)

